



The made in Italy **ERMES T 100/600 Series UPS** with **Transformer IGPT-based rectifier DSP** technology and true on-line double conversion power protection are ideal for installations requiring high energy efficiency and maximum power available.



Data Center



Medical
equipment



Industry



Sensitive
IT loads



Telecom



Critical
buildings

Ermes T IGPT

Three Phase
with Isolation Transformer & IGBT-based rectifier UPS

100KVA ~ 600KVA

www.itapower.it

Made in Italy

Ermes T IGPT

Three Phase
with Isolation Transformer
& IGBT-based rectifier UPS

100KVA ~ 600KVA



Made in Italy




highlights

- ① High efficiency (up to 95.5% in ON LINE mode)
- ① kW=KVA
- ① Rectifier IGBT based technology
- ① Galvanic isolation
- ① High overload capacity
- ① LCD display

ERMES T series provides exceptional operating efficiency (over more conventional thyristor rectifier-based systems), a compact footprint and easy maintenance access.

MODEL	EI100	EI120	EI160	EI200	EI250	EI300	EI400	EI500	EI600
INPUT									
Nominal Voltage	380-400-415 Vac three-phase + N								
Frequency	45-65 Hz								
Power Factor	≥ 0.99								
Harmonic Current Distortion	THDI ≤ 3%								
Soft Start	0-100% in 120" (selectable)								
Frequency Tolerance	±2% (Slectable from ± 1% to 5% from pannel control								
Standard equipment	Backfeed protection; separable bypass line								
OUTPUT									
Nominal Power KVA	100	120	160	200	250	300	400	500	600
Active Power KW	90	108	144	180	225	270	360	450	540
Number of phases	3+N								
Static Stability	± 1%								
Dynamic Stability	± 5% in 10 ms								
Nominal Frequency	50/60Hz (Selectable)								
Voltage Distortion	< 1% (Linear Load); < 3 % (Non-linear load)								
Overload	110% for 60', 125% for 10', 150% dor 1'								
BYPASS									
Nominal Voltage	380-400-415 Vac three-phase + N								
Nominal Frequency	50/60Hz (Selectable)								
BATTERY									
Battery Type	VLRA AGM/GEL/NiCd/Li-ion/super caps								
Ripple Current	Zero								
Recharge Voltage compensation	< 90% non- condensing								
INFO FOR ISOLATION									
Dimension, D X W X H	800 x 840 x 1900		1000 x 840 x 1900			1500 x 1000 x 1900		2100 x 840 x 1900	
Net Weight(kgs)	656	700	800	910	1000	1400	1700	2100	2400
Remot signal	Dry contacts (configurable)								
Remot control	EDS and bypass (configurable)								
Communication	Double RS232+Dry contacts+2slot for communications interface								
Operation temperature	0°C/+40°C								
Humidity									
Noise Level@1 Meter	63-68 dBA				70-72dBA				
IP rating	IP 20								
Smart active efficiency	up to 98,5%								
EMC/safety	Safety IEC EN 62040-1; EMC IEC EN 62040-2 C2; (Voltage Frequency Independent) VFI - SS - 111								

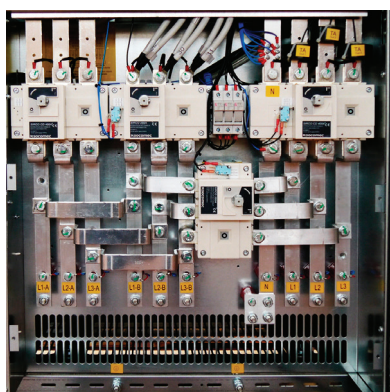

**Mains,
Bypass
and Load
connections**